

Stratasys



FDM 3D Printers and Materials.


Reliable. Repeatable. Exceptional.



FDM

Stronger. Faster. Better.

The FDM technology with unmatched versatility and proven performance.

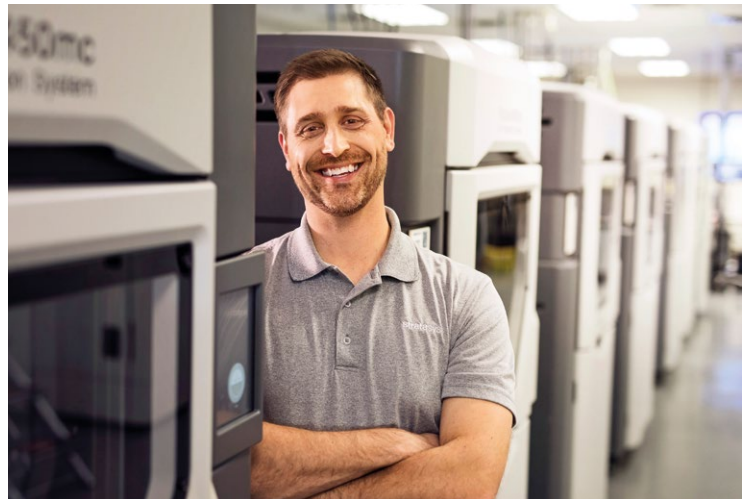

Flexible options. Durable results.

FDM® (fused deposition modeling) 3D Printers offer unparalleled versatility to turn your CAD files into durable parts. These parts are tough enough to be used as advanced conceptual models, functional prototypes, manufacturing tools and production parts. Engineers can produce a wide variety of products just by loading different files and materials. No traditional machining process can do that.



Superior materials. Unrivalled repeatability.

FDM technology works with engineering-grade thermoplastics to build strong, long-lasting and dimensionally stable parts with the best accuracy and repeatability of any 3D printing technology. FDM machines make parts with the most commonly used thermoplastics, such as ABS, polycarbonate, a variety of blends, as well as engineered thermoplastics for aerospace, medical, automotive, electronic and other specialty applications. When using 3D printing for validation prototypes and the production of finished goods, using a durable, proven thermoplastic is all the more important, and it may be the only choice for many applications.





Bigger parts. Improved designs.

FDM systems are as versatile and durable as the parts they produce. The most advanced FDM 3D Printers boast the largest build envelopes and material capacities in their class, delivering longer, uninterrupted build times, bigger parts and higher production run quantities than other additive manufacturing systems. Plus, they're true production workhorses, delivering the high throughput, duty cycles and utilization rates that make digital manufacturing not only possible, but practical.



Faster workflow. Efficient processes.

FDM 3D Printers can streamline processes from design through manufacturing, reducing costs and eliminating traditional barriers along the way. With FDM, a designer can create an idea, and test it the same day. Industries can cut lead times and costs, products turn out better, and get to market faster. Breakthrough designs, process innovations, just-in-time manufacturing — whatever you can imagine, FDM can make it happen.



**More
materials.
More
benefits.**



| Material | Highlights |
|--|--|
| Antero™ 800NA (polyetherketoneketone) | <ul style="list-style-type: none"> High heat and chemical resistance Low outgassing and high dimensional stability Excellent strength, toughness and wear-resistant properties |
| Antero™ 840CN03 | <ul style="list-style-type: none"> Excellent ESD (electrostatic dissipative) properties High heat and chemical resistance Low outgassing and high dimensional stability Excellent strength, toughness and wear-resistant properties |
| ULTEM™ 1010 resin (polyetherimide) | <ul style="list-style-type: none"> Food safety and bio-compatibility certification Highest heat resistance, chemical resistance and tensile strength Outstanding strength and thermal stability |
| ULTEM™ 9085 resin (polyetherimide) | <ul style="list-style-type: none"> FST (flame, smoke, toxicity)-certified thermoplastic High heat and chemical resistance; highest flexural strength Ideal for commercial transportation applications such as airplanes, buses, trains and boats |
| PPSF (polyphenylsulfone) | <ul style="list-style-type: none"> Mechanically superior material, greatest strength Ideal for applications in caustic and high heat environments |
| ST-130™ (Sacrificial Tooling) | <ul style="list-style-type: none"> Designed specifically for hollow composite parts Fast, hands-free dissolution time High heat and autoclave pressure resistance |
| FDM Nylon 6™ (polyamide 6) | <ul style="list-style-type: none"> Combines strength and toughness superior to other thermoplastics Produces durable parts with a clean finish and high break resistance |
| FDM Nylon 12™ (polyamide 12) | <ul style="list-style-type: none"> The toughest nylon in additive manufacturing Excellent for repetitive snap fits, press fit inserts and fatigue-resistance applications Simple, clean process – free of powders |
| FDM Nylon 12CF™ (polyamide 12CF) | <ul style="list-style-type: none"> Carbon fiber reinforced thermoplastic with excellent structural characteristics Highest flexural strength Highest stiffness-to-weight ratio |
| PC (polycarbonate) | <ul style="list-style-type: none"> Most widely used industrial thermoplastic with superior mechanical properties and heat resistance Accurate, durable and stable for strong parts, patterns for metal bending and composite work Great for demanding prototyping needs, tooling and fixtures |
| PC-ISO™ (polycarbonate - ISO 10993 USP Class VI biocompatible) | <ul style="list-style-type: none"> Biocompatible (ISO 10993 USP Class VI)¹ material Sterilizable using gamma radiation or ethylene oxide (EtO) sterilization methods Best fit for applications requiring higher strength and sterilization |
| PC-ABS (polycarbonate - acrylonitrile butadiene styrene) | <ul style="list-style-type: none"> Superior mechanical properties and heat resistance of PC Excellent feature definition and surface appeal of ABS Hands-free support removal with soluble support |
| ASA (acrylonitrile styrene acrylate) | <ul style="list-style-type: none"> Build UV-stable parts with the best aesthetics of any FDM material Ideal for production parts for outdoor infrastructure and commercial use, outdoor functional prototyping and automotive parts and accessory prototypes |
| ABS-ESD7™ (acrylonitrile butadiene styrene - static dissipative) | <ul style="list-style-type: none"> Static-dissipative with target surface resistance of 10⁷ ohms (typical range 10⁹ – 10⁶ ohms)² Makes great assembly tools for electronic and static-sensitive products Widely used for functional prototypes of cases, enclosures and packaging |
| ABS-M30i™ (acrylonitrile butadiene styrene - ISO 10993 USP Class VI biocompatible) | <ul style="list-style-type: none"> Biocompatible (ISO 10993 USP Class VI)¹ material Sterilizable using gamma radiation or ethylene oxide (EtO) sterilization methods Best fit for applications requiring good strength and sterilization |
| ABS-M30™ (acrylonitrile butadiene styrene) | <ul style="list-style-type: none"> Versatile material: good for form, fit and functional applications Familiar production material for accurate prototyping |
| Diran™ 410MF07 | <ul style="list-style-type: none"> Good mechanical properties and toughness Smooth texture with low sliding friction Best fit for production of jigs, fixtures and manufacturing aids |
| PLA (Polylactic acid) | <ul style="list-style-type: none"> Fast printing Good tensile strength Economical and user-friendly Ideal for concept models |
| FDM™ TPU 92A (thermoplastic polyurethane) | <ul style="list-style-type: none"> Elastomer material with Shore A value of 92 Extremely flexible, durable and resilient Compatible with soluble support Accelerates elastomer prototyping without the need for molds |

¹ It is the responsibility of the finished device manufacturer to determine the suitability of all the component parts and materials used in their finished products.

² Actual surface resistance may range from 109 to 106 ohms, depending upon geometry, build style and finishing techniques.

A printer for every purpose.



| | F120™ | F170™ | F270™ |
|----------------------------|--|--|--|
| Build Envelope | 10 x 10 x 10 in. (254 x 254 x 254 mm) | 10 x 10 x 10 in. (254 x 254 x 254 mm) | 12 x 10 x 12 in. (305 x 254 x 305 mm) |
| System Size/Weight | 35 x 35 x 29 in. (889 x 889 x 721 mm), 275 lbs (124 kg) | 64 x 34 x 28 in. (1626 x 864 x 711 mm) 500 lbs (227 kg) with consumables | 64 x 34 x 28 in. (1626 x 864 x 711 mm) 500 lbs (227 kg) with consumables |
| Material Options | ABS-M30, ASA | ABS-M30, ASA, PLA, FDM TPU 92A | ABS-M30, ASA, PLA, FDM TPU 92A |
| Throughput Comparison | 1.5 x (standard mode) 3 x (fast-draft mode) | 1.5 x (standard mode) 3 x (fast-draft mode) | 1.5 x (standard mode) 3 x (fast-draft mode) |
| Part Accuracy ¹ | Parts are produced within an accuracy of +/- .008 in. (.200 mm), or +/- .002 in./in. (.002 mm/mm), whichever is greater. | Parts are produced within an accuracy of +/- .008 in. (.200 mm), or +/- .002 in./in. (.002 mm/mm), whichever is greater. | Parts are produced within an accuracy of +/- .008 in. (.200 mm), or +/- .002 in./in. (.002 mm/mm), whichever is greater. |
| Software | GrabCAD Print™: GrabCAD Print simplifies the traditional 3D print preparation workflow and provides intelligence around printer usage so your team can get quality prints, faster. Print directly from CAD, organize print queues, monitor material levels and work with detailed views of your model. The tray and slice preview feature supports adjustments before going to print. | | |



| | F370™ | Fortus 380mc™ ³ | Fortus 450mc™ | F900™ |
|----------------------------|---|--|--|---|
| Build Envelope | 14 x 10 x 14 in. (355 x 254 x 355 mm) | 14 x 12 x 12 in. (355 x 305 x 305 mm) | 16 x 14 x 16 in. (406 x 355 x 406 mm) | 36 x 24 x 36 in. (914 x 610 x 914 mm) |
| System Size/Weight | 64 x 34 x 28 in. (1,626 x 864 x 711 mm) | 50 x 35.5 x 76.5 in. (1,270 x 901.7 x 1,984 mm) | 50 x 35.5 x 76.5 in. (1,270 x 901.7 x 1,984 mm) | 109.1 x 66.3 x 79.8 in. (2,772 x 1,683 x 2,027 mm) |
| | 500 lbs (227 kg) with consumables | 1,325 lbs (601 kg) | 1,325 lbs (601 kg) | 6,325 lbs (2,869 kg) |
| Material Options | F370: ABS-M30, ASA, PC-ABS, PLA, Diran 410MF07, ABS-ESD7, FDM TPU-92A | ABS-M30, ABS-M30i, ABS-ESD7, ASA, PC-ISO, PC, PC-ABS, FDM Nylon 12 Fortus 380mc Carbon Fiber Edition: ASA and FDM Nylon 12CF | ABS-M30, ABS-M30i, ABS-ESD7, Antero 800NA, ASA, PC-ISO, PC, PC-ABS, FDM Nylon 12, FDM Nylon 12CF, ST-130, ULTEM™ 9085 resin, ULTEM™ 1010 resin | ABS-M30, ABS-M30i, ABS-ESD7, Antero 800NA, Antero 840CN03, ASA, PC-ISO, PC, PC-ABS, PPSF, FDM Nylon 12, FDM Nylon 12CF, FDM Nylon 6, ST-130, ULTEM™ 9085 resin, ULTEM™ 1010 resin |
| Throughput Comparison | 1.5 x (standard mode) 3 x (fast-draft mode) | 2.0 x | 2.0 x | 2.1 x |
| Part Accuracy ¹ | Parts are produced within an accuracy of: +/- .008 in. (.200 mm), or +/- .002 in./in. (.002 mm/mm), whichever is greater. | Parts are produced within an accuracy of ± .005 in. (.127 mm) or ± .0015 in./in. (.0015 mm/mm), whichever is greater. | Parts are produced within an accuracy of ± .005 in. (.127 mm) or ± .0015 in./in. (.0015 mm/mm), whichever is greater. | Parts are produced within an accuracy of: ± .0035 in. (.09 mm) or ± .0015 in./in. (.0015 mm/mm), whichever is greater. ² |
| Software | <p>Insight™: Insight software prepares 3D digital part files (output as an STL) to be manufactured on an FDM 3D Printer by automatically slicing and generating support structures and material extrusion paths in one push of a button. If necessary, users can override Insight's defaults to manually edit parameters that control the look, strength and precision of parts as well as the time, throughput, expense and efficiency of the FDM process.</p> <p>Control Center™: Control Center is the software that communicates between the user workstation(s) and the FDM system(s), managing jobs and monitoring the production status of FDM systems. This software application provides the control to maximize efficiency, throughput and utilization while minimizing response time. Control Center is included with Insight software.</p> <p>GrabCAD Print: GrabCAD Print simplifies the traditional 3D print preparation workflow and provides intelligence around printer usage so your team can get quality prints, faster. Print directly from CAD, organize print queues, monitor material levels and work with detailed views of your model. The tray and slice preview feature supports adjustments before going to print.</p> | | | |

¹ Accuracy is geometry-dependent. Achievable accuracy specification derived from statistical data at 95% dimensional yield. Z part accuracy includes an additional tolerance of -0.000/+slice height.

² See Fortus 900mc accuracy study white paper for more information.

³ Fortus 380mc Carbon Fiber Edition runs only ASA and FDM Nylon 12CF, but is identical to the Fortus 380mc otherwise.

Premium materials. Premium performance.

FDM 3D Printers use a variety of engineering-grade thermoplastics to manufacture functional parts direct from digital data. FDM thermoplastics are environmentally stable, so overall shape and part accuracy don't change with ambient conditions over time, unlike the powders in competitive processes. Materials are easy to change on FDM 3D Printers, with no mess or complicated processes. When combined with FDM 3D Printers, FDM thermoplastics give you high-quality thermoplastic parts that are ideal for concept modeling, functional prototyping, manufacturing tools or production parts.

| | Antero 800NA | Antero 840CN03 | ULTEM™ 1010 resin | ULTEM™ 9085 resin | PPSF | ST-130 |
|--|--|---|---|---|---|-------------------------|
| System Availability | Fortus 450mc F900 | F900 | Fortus 450mc F900 | Fortus 450mc F900 | F900 | Fortus 450mc F900 |
| Layer Thickness | 0.010 in. (0.254 mm) | 0.010 in. (0.254 mm) | 0.020 in. (0.508 mm) ¹¹ 0.013 in. (0.330 mm) 0.010 in. (0.254 mm) | 0.013 in. (0.330 mm) ¹⁰ 0.010 in. (0.254 mm) | 0.013 in. (0.330 mm) ³ 0.010 in. (0.254 mm) | 0.013 in. (0.330 mm) |
| Support Structure | Breakaway | Breakaway | Breakaway | Breakaway | Breakaway | Breakaway |
| Available Colors | ■ Natural | ■ Black | ■ Natural | ■ Tan ■ Black | ■ Tan | ■ Natural |
| Tensile Strength (Ultimate) ² | XZ: 13,504 psi (94 MPa) ZX: 6,650 psi (47 MPa) | XZ: 13,610 psi (95 MPa) ZX: 7,320 psi (50 MPa) | XZ: 11,735 psi (81 MPa) ZX: 5,400 psi (37 MPa) | XZ: 9,950 psi (69 MPa) ZX: 6,100 psi (42 MPa) | XZ: 8,000 psi (55 MPa) | N/A |
| Tensile Elongation ² | XZ: 6.40 ± 1.05% ZX: 1.22 ± 0.28% | XZ: 6% ZX: 1.8% | XZ: 3.3% ZX: 1.3% | XZ: 5.8% ZX: 2.2% | XZ: 3.0% | N/A |
| Flexural Stress | XZ: 20,548 ± 477 psi (142 ± 3 MPa) ZX: 9,349 ± 1,514 psi (64 ± 10 MPa) | XZ: 19,620 psi (135 MPa) ZX: 9,760 psi (70 MPa) | XZ: 20,835 psi (144 MPa) ZX: 11,184 psi (77 MPa) | XZ: 16,200 psi (112 MPa) ZX: 9,900 psi (68 MPa) | XZ: 15,900 psi (110 MPa) | N/A |
| IZOD Impact, notched | XZ: 0.69 ± 0.12 ft-lb/in (37 ± 6 J/m) ZX: 0.51 ± 0.09 ft-lb/in (27 ± 5 J/m) | XZ: 0.90 ft-lb/in (48 J/m) ZX: 0.5 ft-lb/in (28 J/m) | XZ: 0.8 ft-lb/in (41 J/m) ZX: 0.4 ft-lb/in (24 J/m) | XZ: 2.0 ft-lb/in (120 J/m) ZX: 0.9 ft-lb/in (48 J/m) | XZ: 1.1 ft-lb/in (59 J/m) | N/A |
| Heat Deflection at 264 psi | 297 °F (147 °C) | 306 °F (153 °C) | 415 °F (213 °C) | 307 °F (153 °C) | 372 °F (189 °C) | 226 °F (108 °C) |
| Unique Properties | High strength, and heat and chemical resistance, low outgassing | Electrostatic dissipative (ESD) properties | Food-safety and bio-compatibility certification | Flame, smoke, toxicity (FST) certified, ULTEM™ 9085 resin Aerospace grade available | Highest heat and chemical resistance | Sacrificial tooling |

| | FDM Nylon 6 | FDM Nylon 12 | FDM Nylon 12CF | PC | PC-ISO |
|--|---|---|--|--|---|
| System Availability | F900 | Fortus 380mc Fortus 450mc F900 | Fortus 450mc F900 Fortus 380mc Carbon Fiber Edition | Fortus 380mc Fortus 450mc F900 | Fortus 380mc Fortus 450mc F900 |
| Layer Thickness | 0.013 in. (0.330 mm) 0.010 in. (0.254 mm) | 0.013 in. (0.330 mm) 0.010 in. (0.254 mm) 0.007 in. (0.178 mm) | 0.010 in. (0.254 mm) | 0.013 in. ⁵ (0.330 mm) 0.010 in. (0.254 mm) 0.007 in. (0.178 mm) 0.005 in. (0.127 mm) ^{1,5} | 0.013 in. (0.330 mm) 0.010 in. (0.254 mm) 0.007 in. (0.178 mm) |
| Support Structure | Soluble | Soluble | Soluble | Breakaway, Soluble | Soluble |
| Available Colors | ■ Black | ■ Black | ■ Black | □ White | □ White ■ Translucent Natural |
| Tensile Strength (Ultimate) ² | XZ: 9,800 psi (67.6 MPa) ZX: 5,300 psi (36.5 MPa) | XZ: 6,650 psi (46 MPa) ZX: 5,600 psi (38.5 MPa) | XZ: 10,960 psi (75.6 MPa) ZX: 4,990 psi (34.4 MPa) | XZ: 8,300 psi (57 MPa) ZX: 6,100 psi (42 MPa) | XZ: 8,300 psi (57 MPa) |
| Tensile Elongation ² | XZ: 38% ZX: 3.2% | XZ: 30% ZX: 5% | XZ: 1.9% ZX: 1.2% | XZ: 4.8% ZX: 2.5% | XZ: 4% |
| Flexural Stress | XZ: 14,100 psi (97.2 MPa) ZX: 11,900 psi (82 MPa) | XZ: 9,700 psi (67 MPa) ZX: 8,800 psi (61 MPa) | XZ: 20,660 psi (142 MPa) ZX: 8,430 psi (58.1 MPa) | XZ: 13,000 psi (89 MPa) ZX: 9,900 psi (68 MPa) | XZ: 13,100 psi (90 MPa) |
| IZOD Impact, notched | XZ: 2.0 ft-lb/in (106 J/m) ZX: 0.8 ft-lb/in (43 J/m) | XZ: 2.5 ft-lb/in (135 J/m) ZX: 1 ft-lb/in (53 J/m) | XZ: 1.6 ft-lb/in (85 J/m) ZX: 0.4 ft-lb/in (21.4 J/m) | XZ: 1.4 ft-lb/in (73 J/m) ZX: 0.5 ft-lb/in (28 J/m) | XZ: 1.6 ft-lb/in (86 J/m) |
| Heat Deflection Temp at 264 psi | 199 °F (93 °C) | 180 °F ⁶ (82 °C) ⁶ | 289 °F (143 °C) | 261 °F (127 °C) | 260 °F (127 °C) |
| Unique Properties | Very high strength and toughness combined | Fatigue-resistant, high elongation at break | Highest flexural strength of any FDM material | Strong (tension) | ISO 10993 USP Class VI ⁴ |

Premium materials. Premium performance.

(Continued)

| | PC-ABS | ASA | ABS-ESD7 | ABS-M30i |
|--|--|---|---|--|
| System Availability | Fortus 380mc | Fortus 380mc | Fortus 380mc | Fortus 380mc |
| | Fortus 450mc | Fortus 450mc | Fortus 450mc | Fortus 450mc |
| | F370 | F120 | F370 | F900 |
| | F900 | F170 | F900 | |
| | | F270 | | |
| | | F370 | | |
| | | F900 | | |
| Layer Thickness | 0.013 in. (0.330 mm) | 0.020 in. (0.508 mm) | 0.010 in. (0.254 mm) | 0.013 in. (0.330 mm) |
| | 0.010 in. (0.254 mm) | 0.013 in. (0.330 mm) | 0.007 in. (0.178 mm) | 0.010 in. (0.254 mm) |
| | 0.007 in. (0.178 mm) | 0.010 in. (0.254 mm) | | 0.007 in. (0.178 mm) |
| | 0.005 in. (0.127 mm) ¹ | 0.007 in. (0.178 mm) | | 0.005 in. (0.127 mm) ¹ |
| | | 0.005 in. (0.127 mm) | | |
| Support Structure | Soluble | Soluble | Soluble | Soluble |
| Available Colors | <ul style="list-style-type: none"> ■ Black □ White² | <ul style="list-style-type: none"> ■ Ivory¹² ■ Black ■ Dark Gray ■ Light Gray □ White | <ul style="list-style-type: none"> ■ Red ■ Orange ■ Yellow ■ Green ■ Dark Blue | <ul style="list-style-type: none"> ■ Black ■ Ivory |
| Tensile Strength (Ultimate) ² | XZ: 5,900 psi (41 MPa) | XZ: 4,750 psi (33 MPa) ZX: 4,300 psi (30 MPa) | XZ: 5,200 psi (36 MPa) | XZ: 4,650 psi (36 MPa) |
| Tensile Elongation ² | XZ: 6% | XZ: 9% ZX: 3% | XZ: 3.0% | XZ: 4% |
| Flexural Stress | XZ: 9,800 psi (68 MPa) | XZ: 8,700 psi (60 MPa) ZX: 6,900 psi (48 MPa) | XZ: 8,800 psi (61 MPa) | XZ: 8,800 psi (61 MPa) |
| IZOD Impact, notched | XZ: 3.7 ft-lb/in (196 J/m) | XZ: 1.2 ft-lb/in (64 J/m) | XZ: 0.5 ft-lb/in (28 J/m) | XZ: 2.6 ft-lb/in (139 J/m) |
| Heat Deflection Temp at 264 psi | 205 °F (96 °C) | 196 °F (91 °C) | 180 °F (82 °C) | 180 °F (82 °C) |
| Unique Properties | Strong (impact) | UV stable with the best aesthetics of any FDM material | Static-dissipative, target surface resistance of 107 ohms ⁷ | ISO 10993 USP Class VI ⁴ |

| | ABS-M30** | Diran 410MF07 | PLA | FDM TPU 92A | |
|--|---|---|--|--|--|
| System Availability | Fortus 380mc | F370 | F170 | F170 | |
| | Fortus 450mc | | F270 | F270 | |
| | F120 | | F370 | F370 | |
| | F170 | | | | |
| | F270 | | | | |
| | F370 | | | | |
| Layer Thickness | 0.013 in. (0.330 mm) | 0.007 in. (0.178 mm) | 0.010 in. (0.254 mm) | 0.010 in. (0.254 mm) | |
| | 0.010 in. (0.254 mm) | 0.010 in. (0.254 mm) | | | |
| | 0.007 in. (0.178 mm) | 0.013 in. (0.330 mm) | | | |
| | 0.005 in. (0.127 mm) ¹ | | | | |
| Support Structure | Soluble | Breakaway | Breakaway | Soluble | |
| Available Colors | <ul style="list-style-type: none"> ■ Ivory □ White ■ Black¹³ ■ Dark Gray ■ Red | <ul style="list-style-type: none"> ■ Blue ■ Orange⁸ ■ Yellow⁸ ■ Green⁸ □ Custom Colors | <ul style="list-style-type: none"> ■ Black □ White ■ Light Gray ■ Medium Gray ■ Red ■ Blue ■ Natural Translucent | <ul style="list-style-type: none"> ■ Red Translucent ■ Blue Translucent ■ Yellow Translucent ■ Green Translucent | <ul style="list-style-type: none"> ■ Black |
| | | | | | |
| Tensile Strength (Ultimate) ² | XZ: 4,650 psi (32 MPa) | XZ: 6,490 psi (45 MPa) | XZ: 6,990 psi (48 MPa) | XZ: 2,519 psi (17.4 MPa) | |
| | ZX: 4,050 psi (28 MPa) | ZX: 4,460 psi (30 MPa) | ZX: 3,830 psi (26 MPa) | XY: 2,432 psi (16.8 MPa) | |
| Tensile Elongation ² | XZ: 7.0% | XZ: 12% | XZ: 2.5% | XZ: 482% | |
| | ZX: 2% | ZX: 3.1% | ZX: 1.0% | XY: 552% | |
| Flexural Stress | XZ: 8,700 psi (60 MPa) | XZ: 8,800 psi (60 MPa) | XZ: 12,190 psi (84 MPa) | XZ: 351 psi (2.4 MPa) | |
| | ZX: 7,000 psi (48 MPa) | ZX: 6,770 psi (45 MPa) | ZX: 6,750 psi (45 MPa) | XY: 255 psi (1.8 MPa) | |
| IZOD Impact, notched | XZ: 2.4 ft-lb/in (128 J/m) | XZ: 7 ft-lb/in (380 J/m) ZX: 0.5 ft-lb/in (27 J/m) | XZ: 0.5 ft-lb/in (27 J/m) | – | |
| Heat Deflection Temp at 264 psi | 180 °F (82 °C) | 158 °F (70 °C) | 124 °F (51 °C) | 100 °F (38 °C) (@ 66 psi) | |
| Unique Properties | Variety of color options | Smooth, lubricious texture with low sliding friction | Low cost, fast-draft printing | Elastomer | |

¹ 0.005 in. (0.127 mm) layer thickness not available for Stratasys F900.

² See individual material spec sheets for testing details.

³ 0.013 in. (0.330 mm) layer thickness for PPSF not available on Stratasys F900.

⁴ It is the responsibility of the finished device manufacturer to determine the suitability of all the component parts and materials used in their finished products.

⁵ PC can attain 0.013 in. (0.330 mm) layer thickness when use with break away support. PC can attain 0.005 in. (0.127mm) layer thickness when used with SR-100 soluble support.

⁶ Annealed.

⁷ Actual surface resistance may range from 109 to 106 ohms, depending upon geometry, build style and finishing techniques.

⁸ Available only on the Stratasys F123 Series.

⁹ Available only on the Stratasys F370.

¹⁰ Available on Fortus 400mc and Stratasys F900.

¹¹ Available on the F170, F270, F370 and F900.

¹² F120 is only available with ASA Ivory.

¹³ ABS is only available in Black on F120.

** Mechanical properties are measured on the Fortus systems and may vary with other printers.

Advanced materials. Designed to give you more.



We not only provide the widest choice of materials, we'll also help you get the best out of them.

We're continually developing and investing in our hardware, software and services to help you get the best possible results. Improving accuracy, flexibility and reliability. All in less time, with less hassle.

Make it with Stratasys.



Get in touch.

HEADQUARTERS

3-4 Innovation Way,
North Staffs Business Park,
Stoke-On-Trent
ST6 4BF

www.tritech3d.co.uk

info@tritech3d.co.uk

01782 814551

ISO 9001:2015 Certified

© 2019 Stratasys Ltd. All rights reserved. Stratasys, Stratasys logo, Fortus, Fortus 250mc, Fortus 380mc, Fortus 450mc, Fortus 900mc, Stratasys F120, Stratasys F170, Stratasys F270, Stratasys F370, GrabCAD Print, ABSplus, ABSi, ABS-M30, ABS-M30i, ABS-ESD7, FDM, FDM Nylon 12, FDM Nylon 12CF, FDM Nylon 6, PC-ISO, Antero 840CN03, Diran 410MF07, Insight, Control Center, For a 3D World and ST-130 are trademarks or registered trademarks of Stratasys Ltd. and/or its subsidiaries or affiliates and may be registered in certain jurisdictions. ULTEM™ is a registered trademark of SABIC or its affiliates. All other trademarks are the property of their respective owners, and Stratasys assumes no responsibility with regard to the selection, performance or use of these non-Stratasys products. BR_FDM_SystemsOverview_0919a